



**PARAGON
AQUATICS**

Pentair Water



TRACK START SIZE . . . QUICKSET CONVENIENCE

*Install the State-of-the-Art Track Start Quickset
at Your Facility . . . and Experience Results*

FEATURES:

- ▶ Our newest starting platform offers our patent-pending, sand/grooved finish, Track Start top (24" wide x 32" deep) mounted to a single-leg quickset stainless steel pedestal.
- ▶ Patented Quickset/Taper-Lock Anchor System enables the starting platform pedestal to slip easily into a fitted anchor sleeve and centers itself onto a taper-lock base, which provides a secure and easy set-up without the use of tools.
- ▶ Designed to accommodate most pool configurations, however, custom designs are available.
- ▶ A seamless upgrade and replacement to your existing Paragon Standard Quickset Platforms, it is designed to use existing Quickset Anchors.
- ▶ Pedestal Powder Coating is now available in a variety of colors.
- ▶ Combined with our platform top colors and graphics, these options make your starting platforms one of a kind.

Paragon Aquatics/Division of Pentair Water Pool & Spa, Inc.
1351 Route 55, LaGrangeville, NY 12540 USA
845.452.5500 • 888.KDI.SWIM • Fax: 845.452.5426
www.paragonaquatics.com

thinking toward the future . . . changing with the times




**PARAGON
AQUATICS**

Pentair Water

TRACK START QUICKSET STARTING PLATFORM SPECIFICATIONS

- 1** The Track Start Quickset starting platform shall have an elevated platform top supported by a sloping stainless steel pedestal. The platform pedestal shall be manufactured of 2-1/2" sq. x .125" wall thickness. The backstroke bar and step supports shall be made of 1.50" sq. x .065" wall thickness. The platform pedestal, back stroke bar and step supports shall be Type 304 stainless steel polished to a 320 grit finish (optional powder coating available). The backstroke bar and step supports shall be fully welded to the pedestal.
- 2** The platform top (24" wide x 32" deep) and intermediate step (8" x 12") shall be constructed of UV inhibited high density polypropylene. It shall have a dual non-skid, cross-grooved, sand textured finish surface. The top shall be permanently positioned at a 10° tilt towards the pool.
- 3** A backstroke bar with rubber hand grips shall be located in a range consistent with all ruling bodies. The backstroke bar is 1.00" O.D. x .065" wall thickness, Type 304 stainless steel.
- 4** The platform shall be anchored to the patented taper-lock quickset anchor socket, ID #23301, and shall be removable without the use of tools.

General: The stainless steel frame shall be electro-chemically passivated on all worked areas for maximum corrosion resistance. All hardware shall be 18-8 stainless steel. Custom designs and modifications are available upon request.

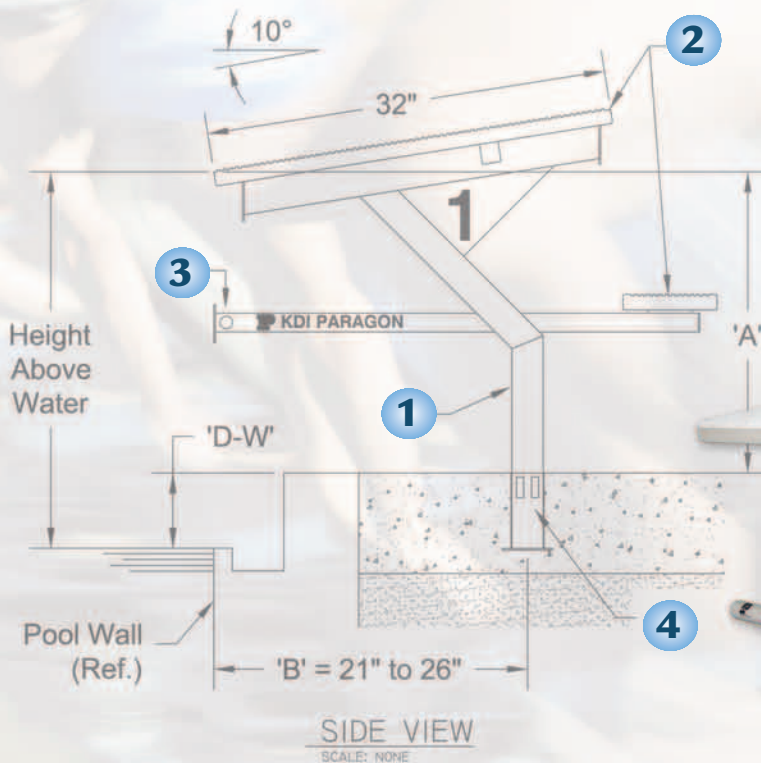

thinking toward the future... changing with the times